



### Key Features & Benefits

- ▶ Design Lights Consortium Certified
- ▶ Long Life LED Chips
- ▶ Uniform and consistent color
- ▶ Excellent thermal design
- ▶ 15-30 foot height performance
- ▶ Shatter-resistant glass
- ▶ Universal Voltage 120-277V
- ▶ Operating Temp: -22°F~122°F
- ▶ 50,000 hrs rated average life
- ▶ Photocell sensor compatible

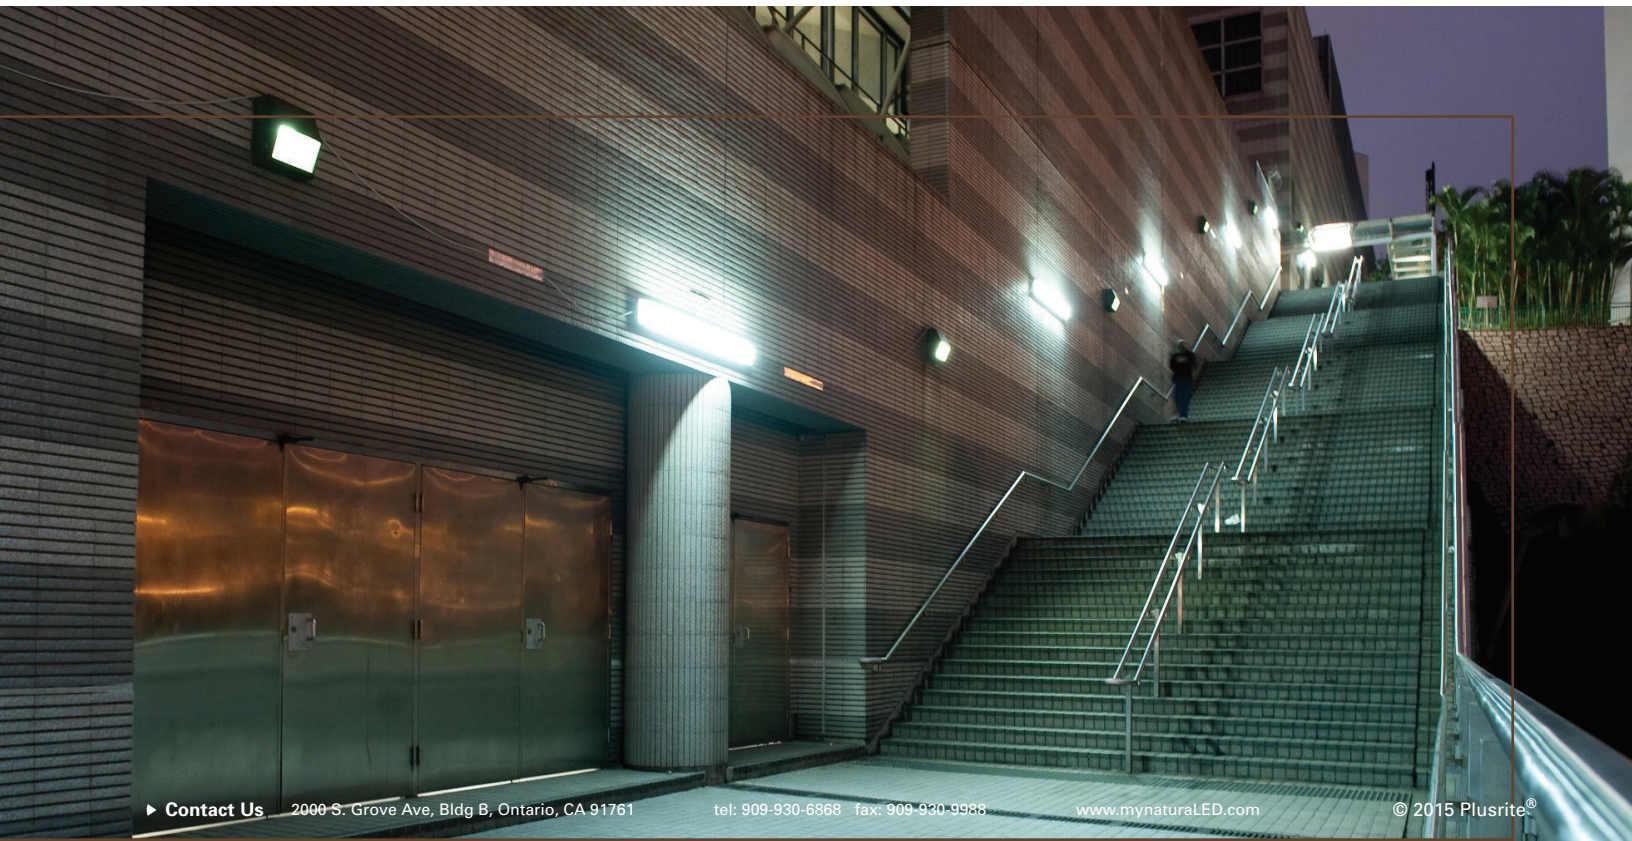
### Applications

- ▶ Area Lighting
- ▶ Security Lighting
- ▶ Pathway Lighting
- ▶ Perimeter Lighting
- ▶ Entryway Lighting



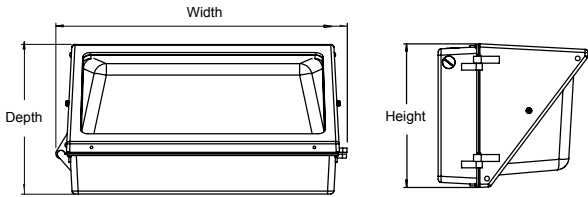
### SHIELD INCLUDED

Requires shield for  
DLC qualification

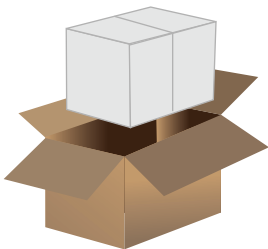
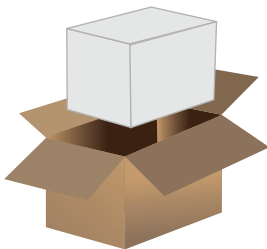


# LED TRADITIONAL WALLPACK TWP

## Dimensions

|  | LED | Width (in/mm) | Height (in/mm) | Depth (in/mm) | Weight (lbs) |
|-----------------------------------------------------------------------------------|-----|---------------|----------------|---------------|--------------|
|                                                                                   | 28W | 8.75 / 220    | 7.25 / 185     | 9 / 230       | 5.75         |
|                                                                                   | 40W | 14.5 / 363    | 9 / 230        | 7.5 / 188     | 9.5          |
|                                                                                   | 60W | 18.5 / 463    | 9 / 230        | 9.25 / 239    | 16           |
|                                                                                   | 90W | 18.5 / 463    | 9 / 230        | 9.25 / 239    | 18.60        |

## Package

|     |                                                                                   |                         |                   |                                                                                    |                       |
|-----|-----------------------------------------------------------------------------------|-------------------------|-------------------|------------------------------------------------------------------------------------|-----------------------|
| 28W |  | Package (Master)<br>1/2 | 40W<br>60W<br>90W |  | Package (Master)<br>1 |
|     |                                                                                   |                         |                   |                                                                                    |                       |
|     |                                                                                   |                         |                   |                                                                                    |                       |
|     |                                                                                   |                         |                   |                                                                                    |                       |

## Product Data

| Item Code | Description        | Wattage    | CCT   | Lumen Output | CRI | Equivalent Wattage | Finish   | Beam Type | IP65 Rated |   |
|-----------|--------------------|------------|-------|--------------|-----|--------------------|----------|-----------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7466      | LED-FXTWP28/40K/DB | <b>28W</b> | 4000K | 3,000        | 70  | 100W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7467      | LED-FXTWP28/50K/DB | <b>28W</b> | 5000K | 3,000        | 70  | 100W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7086      | LED-FXTWP40/40K/DB | <b>40W</b> | 4000K | 3,025        | 80  | 100W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7087      | LED-FXTWP40/50K/DB | <b>40W</b> | 5000K | 3,043        | 80  | 100W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7088      | LED-FXTWP60/40K/DB | <b>60W</b> | 4000K | 4,593        | 80  | 150W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7089      | LED-FXTWP60/50K/DB | <b>60W</b> | 5000K | 4,596        | 80  | 150W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7138      | LED-FXTWP90/40K/DB | <b>90W</b> | 4000K | 6,125        | 80  | 250W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |
| 7139      | LED-FXTWP90/50K/DB | <b>90W</b> | 5000K | 6,550        | 80  | 250W               | D.Bronze | F. Throw  | ●          | ●                                                                                                                                                                           |

\*Please call the office for more details about our Photocell Sensor.



Visit [www.mynaturalLED.com](http://www.mynaturalLED.com) to download the installation guide or contact your sales rep for more information.