



The Paige[®] WALL BUSTER[™]

The revolutionary two-part through wall wiring protection device

Busts material costs: Less expensive than current products


Busts labor costs: Snap fit takes seconds instead of minutes or hours

Busts need for large holes in the wall: 9/16 inch holes are all that is required

Busts wire failures: No sharp metal edges in contact with insulated conductors

Busts Code enforcement problems:

UL Listed and designed
specifically for
LED channel letters

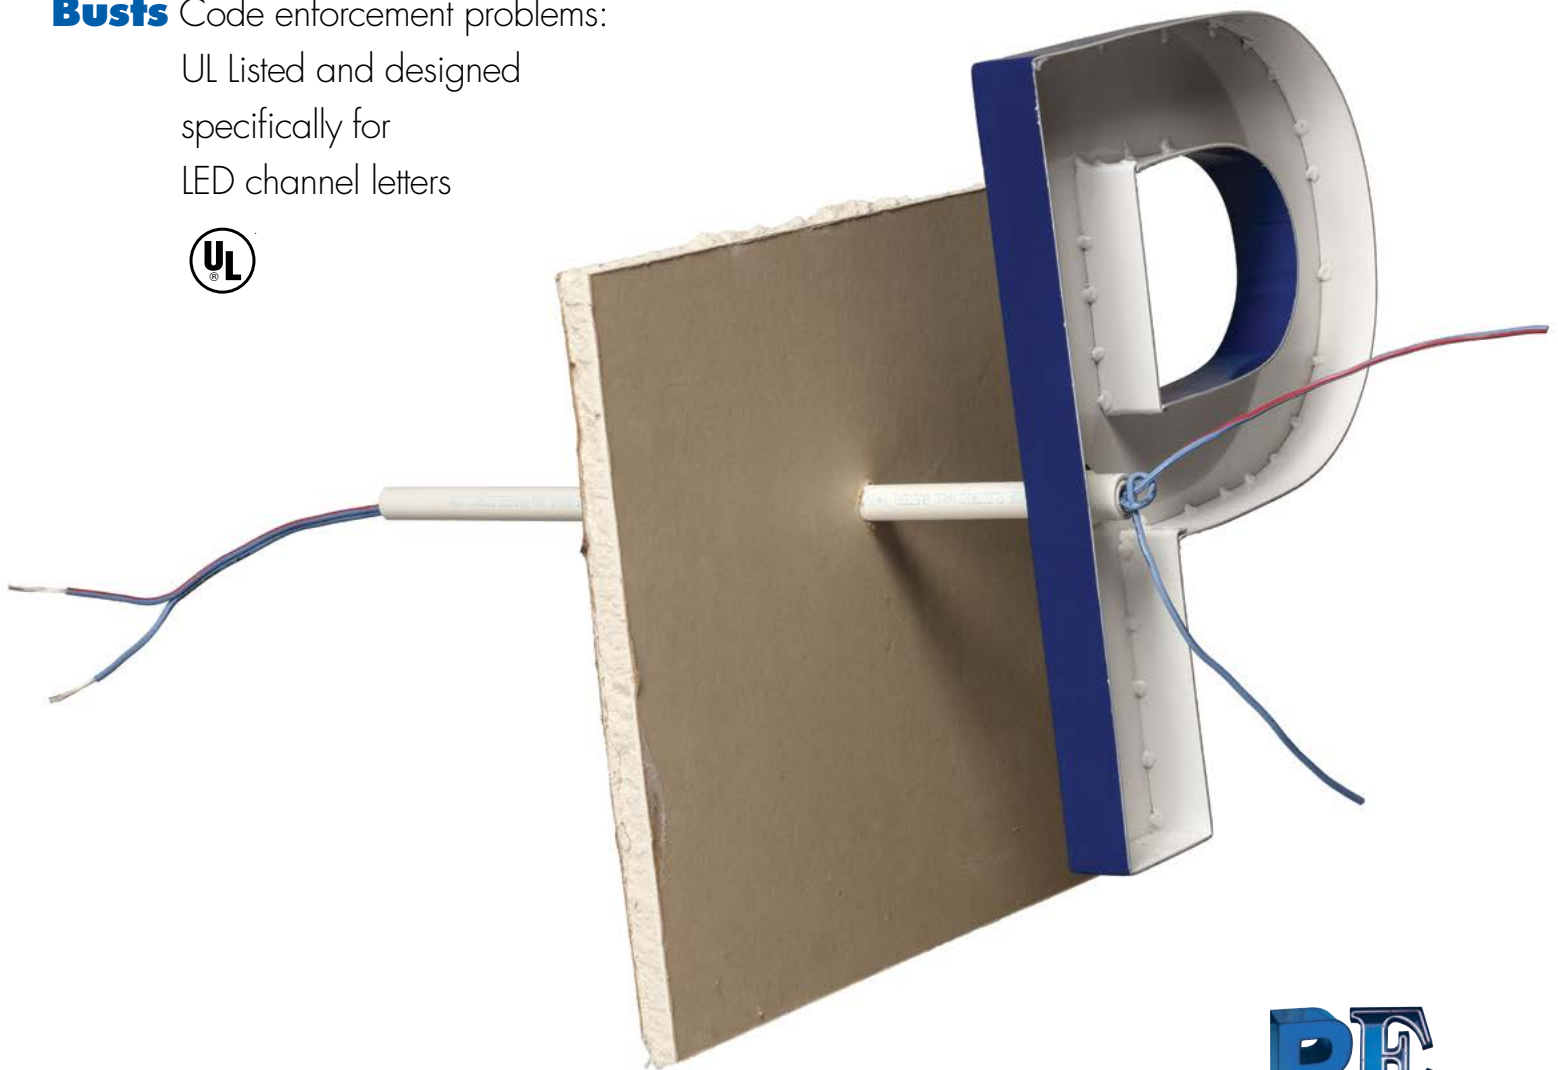

patented

Sales Office:
Roxanne Tobia
800.327.2443 Ext. 1150
roxtobia@paigeelectric.com

Engineering Office:
Roger Rumsey
316.204.3062 (cell)
rrumsey@paigeelectric.com

PE
signwire
accessories
www.paigeelectric.com



Through Wall Protector for CL2, Sunlight Resistant Low Voltage LED Cable

1.0 SCOPE

- 1.1** This specification covers the through wall protection Device "WALL BUSTER™" for use with CL2 cables.

Construction consists of one injection molded locking bushing and one through wall extruded locking tube.

- 1.2 UV Resistant:**
(UL 746)

- 1.3 Fire & Flame Retardancy:**
Complies with V0 (UL 94)

- 1.4 Sunlight Resistant:**
Complies with f1 (UL 746C)

2.0 CONSTRUCTION

2.1 Locking Bushing: Part # 980001

Injection molded

- 2.1.1 1 inch hex base
- 2.1.2 .030 x .030 x 45 degree weather seal ramp
- 2.1.3 Standard -14 NPS threads (1/2 inch electrical fitting threads)
- 2.1.4 Double snap fit locks (locks both in and out when engaged).

2.2 PLTC Wall Feed Through Protection Tube:

- 2.2.1 White Flame retardant Polymer material
- 2.2.2 Inside diameter 0.390"
- 2.2.3 O.D, 0.550"
- 2.2.4 Length 14" and 30"
- 2.2.5 One end beveled and channelled to lock in Bushing

2.3 Surface Print:

PAIGE ELECTRIC WALL BUSTER™, P/N 980014 or P/N 980030, (UL) E339010, SUNLIGHT RESISTANT, WET LISTED, PATENTED www.paigeelectric.com

2.4 Packages:

50 Complete units per box
(50 bushings + 50 Protection Tubes)

Note:

1/2" electrical lock nut not included.