

We BRIGHTEN Your BRANDS

SloanLED Prism Colors

Reimagined LED lens technology

- Brightest lighting option in class
- Widest, most even spread of light
- Optimal for applications 75-200 mm in depth

SPECIFICATIONS

Dimensions L × W × H 70 mm × 19 mm × 13 mm

LEDs per module 3

Operating temperature -40° C to +70° C

Protection class IP66 & IP68¹

Power per module 0.72 W


Fastening Peel-n-stick and mechanical



¹ IP66 & IP68 ratings provide protection for extreme outdoor and wet applications or harsh weather exposure. Do not mount in a submerged application.

SloanLED channel letter products are covered by US and foreign patents pending and covered by one or more of the following US patents issued: 6,932,495, 7,160,140, 7,241,031, 7,520,771, 7,931,386 and European Patent No. 1756471.

Luminous Intensity Distribution

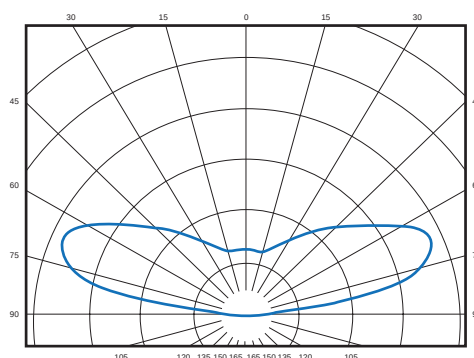

Part number	Color	Nominal wavelength	Modules per meter	Lumens per module (nominal)	Efficacy	Power capacity per SloanLED 60 W 12 VDC power supply	Packaging of 5 trays per carton
701269-RDSJ3-MB	Red	628	6.6/m	24	33.5 lm/W	75 modules (11.4 m)	7.3 m (48 modules) per tray
701269-RDSJ1-MB			4.9/m			75 modules (15.2 m)	9.8 m (48 modules) per tray
701269-ORSJ1-MB	Orange	606					
701269-GRSJ1-MB	Green	527					
701269-BLSJ1-MB	Blue	471		18	25 lm/W		

SloanLED Headquarters
5725 Olivas Park Drive • Ventura, California 93003
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
Overslagweg 7 • 2645 EK Delfgauw • The Netherlands
+31 88 12 44 900 • Europe@SloanLED.com

SloanLED.com

© 2017 SloanLED Rev A 2017-01-05

 **SloanLED®**
Leaders in LED Technology