

LED-1260MMPS



FRANCE COMPACT 60W 12V CLASS P LED POWER SUPPLY



SPECIFICATIONS

Size

7.20" Long x 1.97" Wide x 1.42" Tall
Including Baseplate

Ambient Operating Temperature

-30°C to 60°C

Input

120-277VAC, 50/60Hz, 1.2/.70 Amp Max

Output

12VDC, 5 Amp, 60 Watt
Class 2 Isolated
No Minimum Loading Requirement

Lead Length

12" Input and Output

Environment

IP67, For Use in Damp or Dry Locations
FCC Part 15 Class B Residential or Commercial

Warranty

5 Year France LED Warranty

A Fusion of Performance, Quality, Compact Size, and Value

Compact Size

Low profile, fully potted construction provides maximum durability

Tru-Power™ Rated

Designed to operate reliably at full rated power at maximum rated ambient temperature - No need to de-rate like other competing products

Overload Protection Shut Down

Unit blinks LEDs when significantly overloaded
Integrated short circuit protection with automatic reset

High Electrical Efficiency


Low energy costs and cool operation in a small package
85° maximum case temperature

For more information, contact
your France distributor or email
us at sales@sfeg.com

LED-1260MMPS 60 Watt 12V Class P LED Power Supply

Electrical Specification

| | | | |
|-------------------|-----------------|----------------------|----------|
| Input Voltage | 120VAC 277VAC | Output Voltage | 12VDC |
| Input Frequency | 50/60 Hz | Rated Output Current | 5.0 Amps |
| Max Input Current | 1.2A .70A | Rated Output Power | 60 Watts |

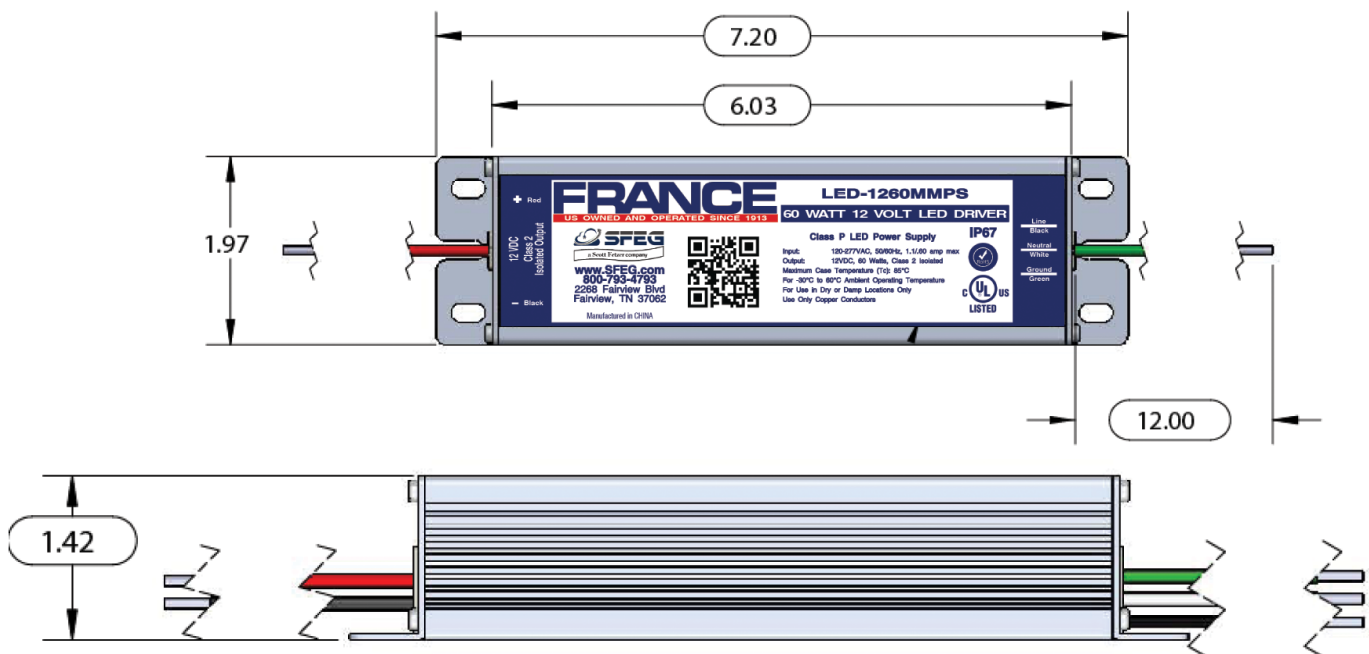

Check out our other LED Products




LED-1260EPS

60W 12V Reliant® Tru-Power™ LED Power Supply
For use in Wet, Dry, or Damp locations
Self protection feature limits output current if overloaded
Self resetting short-circuit protection
Indicator LED notifies of overload conditions


LED Fast-Pak™ Kits

Complete UL listed assemblies, pre-assembled, pre-wired and worry free.




LED Fast-Pak™

14.85" long x 5.30" wide x 3.21" in tall
Features LED-1260EPS power supply
Wet-listed enclosure



mini LED Fast-Pak™

9.71" long x 4.73" wide x 2.99" tall
Features LED-1260MPS power supply
Horizontal or vertical mount
Wet-listed enclosure



Double mini LED Fast-Pak™

10.49" long x 8.78" wide x 2.99" tall
Features 2X LED-1260MPS power supply
Horizontal or vertical mount
Wet-listed enclosure

For more information, contact your France distributor or email us at sales@sfeg.com