

# FRANCE

## PBKMG-51 PBKMCG-51

**Indoor/Outdoor Non-weatherproof  
Internal Mount Electrode Housing**



- ◆ UL 2161 Recognized Component
- ◆ Pre-Wired Primary
- ◆ Available in 30 and 60 mA, 120 and 277 V, Normal and High Power Factor (12000 and 15000 available only in 30 mA)
- ◆ Heavy Duty Steel Construction

**[www.franceformer.com](http://www.franceformer.com)**


2268 Fairview Blvd PO Box 300 Fairview, TN 37062 voice 800-753-2753 fax 615-799-3199

## NORMAL POWER FACTOR

Catalog Number	VAC	Hz	Secondary		Pri VA	Input Volts	SECONDARY GROUND	Wt. Lbs.	Case Dimensions							
			Volts	mA					L	W	H	A	B	C	D	E
15030 PBKMG-51	120	60	15000	30	450	3.75	BMPG	20	11.500	5.130	4.178	10.000	10.625	2.5	2.5	1.5
12030 PBKMG-51	120	60	12000	30	360	3.00	BMPG	20	11.500	5.130	4.178	10.000	10.625	2.5	2.5	1.5
9030 PBKMG-51	120	60	9000	30	280	2.34	BMPG	12	10.125	3.776	3.080	8.625	9.250	2.0	1.8	1.3
7530 PBKMG-51	120	60	7500	30	225	1.88	UMPG	12	10.125	3.776	3.080	8.625	9.250	2.0	1.8	1.3
6030 PBKMG-51	120	60	6000	30	180	1.50	UMPG	11	10.125	3.776	3.080	8.625	9.250	2.0	1.8	1.3
5030 PBKMG-51	120	60	5000	30	160	1.34	UMPG	11	10.125	3.776	3.080	8.625	9.250	2.0	1.8	1.3
4130 PBKMG-51	120	60	4000	30	140	1.17	UMPG	9	8.500	3.776	3.080	7.000	7.620	2.0	1.8	1.3
3030 PBKMG-51	120	60	3000	30	100	.85	OEG	9	8.500	3.776	3.080	7.000	7.620	2.0	1.8	1.3
9060 PBKMG-51	120	60	9000	60	540	4.50	BMPG	21	15.125	3.766	3.447	13.625	14.250	2.0	1.8	1.3
7560 PBKMG-51	120	60	7500	60	450	3.75	BMPG	21	15.125	3.766	3.447	13.625	14.250	2.0	1.8	1.3
6060 PBKMG-51	120	60	6000	60	360	3.00	BMPG	15	11.875	3.766	3.080	10.375	11.000	2.0	1.8	1.3
5060 PBKMG-51	120	60	5000	60	300	2.50	BMPG	15	11.875	3.766	3.080	10.375	11.000	2.0	1.8	1.3
4060 PBKMG-51	120	60	4000	60	240	2.00	UMPG	11	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3
3060 PBKMG-51	120	60	3000	60	180	1.50	UMPG	11	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3
15030 PBKMG-51	277	60	15000	30	450	1.63	BMPG	20	11.500	5.130	4.178	10.000	10.625	2.5	1.8	1.3
12030 PBKMG-51	277	60	12000	30	360	1.30	BMPG	20	11.500	5.130	4.178	10.000	10.625	2.5	1.8	1.3
9030 PBKMG-51	277	60	9000	30	280	1.01	BMPG	12	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3
7530 PBKMG-51	277	60	7500	30	225	.81	UMPG	12	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3
6030 PBKMG-51	277	60	6000	30	190	.69	UMPG	11	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3
5030 PBKMG-51	277	60	5000	30	160	.58	UMPG	10	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3
4130 PBKMG-51	277	60	4000	30	140	.51	UMPG	9	8.500	3.766	3.080	7.000	7.620	2.0	1.8	1.3
9060 PBKMG-51	277	60	9000	60	540	1.95	BMPG	21	15.125	3.766	3.447	13.625	14.250	2.0	1.8	1.3
7560 PBKMG-51	277	60	7500	60	420	1.63	BMPG	21	15.125	3.766	3.447	13.625	14.250	2.0	1.8	1.3
6060 PBKMG-51	277	60	6000	60	370	1.34	BMPG	15	11.875	3.766	3.080	10.375	11.000	2.0	1.8	1.3
5060 PBKMG-51	277	60	5000	60	300	1.08	BMPG	15	11.875	3.766	3.080	10.375	11.000	2.0	1.8	1.3
4060 PBKMG-51	277	60	4000	60	240	.87	UMPG	11	10.125	3.766	3.080	8.625	9.250	2.0	1.8	1.3

## HIGH POWER FACTOR

Catalog Number	VAC	Hz	Secondary		PRI VA	Input Amps	SECONDARY GROUND	Wt. Lbs.	Case Dimensions							
			Volts	mA					L	W	H	A	B	C	D	E
9030 PBKMCG-51	120	60	9000	30	150	1.25	BMPG	13	11.875	3.625	3.080	10.375	11.000	2.0	1.8	1.3
7530 PBKMCG-51	120	60	7500	30	125	1.05	UMPG	13	11.875	3.625	3.080	10.375	11.000	2.0	1.8	1.3
6030 PBKMCG-51	120	60	6000	30	100	.84	UMPG	13	11.875	3.625	3.080	10.375	11.000	2.0	1.8	1.3
5030 PBKMCG-51	120	60	5000	30	90	.75	UMPG	13	11.875	3.625	3.080	10.375	11.000	2.0	1.8	1.3
4030 PBKMCG-51	120	60	4000	30	75	.63	UMPG	12	10.125	3.625	3.080	8.625	9.250	2.0	1.8	1.3
4130 PBKMCG-51	120	60	4100	30	75	.63	OEG	10	10.125	3.625	3.080	8.625	9.250	2.0	1.8	1.3
9060 PBKMCG-51	120	60	9000	60	250	2.50	BMPG	23	16.750	3.625	3.447	15.250	15.875	2.0	1.8	1.3
7560 PBKMCG-51	120	60	7500	60	300	2.09	BMPG	22	16.750	3.625	3.447	15.250	15.875	2.0	1.8	1.3
6060 PBKMCG-51	120	60	6000	60	200	1.67	BMPG	20	13.500	3.625	3.072	12.000	12.625	2.0	1.8	1.3
5060 PBKMCG-51	120	60	5000	60	170	1.42	BMPG	20	13.500	3.625	3.072	12.000	12.625	2.0	1.8	1.3
4060 PBKMCG-51	120	60	4000	60	135	1.13	UMPG	13	11.875	3.625	3.080	10.375	11.000	2.0	1.8	1.3
9060 PBKMCG-51	277	60	9000	60	250	1.09	BMPG	23	16.750	3.625	3.447	15.250	15.875	2.0	1.8	1.3
7560 PBKMCG-51	277	60	7500	60	300	.91	BMPG	22	16.750	3.625	3.447	15.250	15.875	2.0	1.8	1.3
6060 PBKMCG-51	277	60	6000	60	200	.73	BMPG	20	13.500	3.625	3.072	12.000	12.625	2.0	1.8	1.3
5060 PBKMCG-51	277	60	5000	60	170	.62	BMPG	20	13.500	3.625	3.072	12.000	12.625	2.0	1.8	1.3

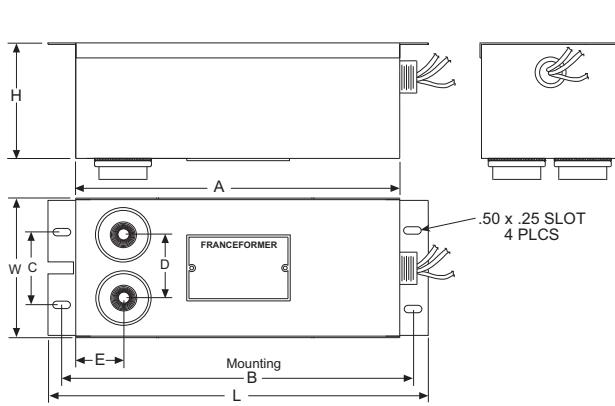

BMPG = Balance Mid-Point Ground

UMPG = Unbalanced Mid-point Ground

OEG = One End Ground

# FRANCE

2268 Fairview Blvd • PO Box 300 • Fairview, TN 37062  
voice 800-753-2753 • fax 615-799-3199