


FinishLine 3® Gravity Feed Spray Gun



FinishLine 3° Gravity Feed Spray Gun

HVLP or Conventional



- High grade aluminum gun body
- All metal construction
- Replaceable threaded baffle for economical servicing
- Gun washer safe

Precision Engineered To Produce Well-Atomized, Uniform Spray Patterns

- Economically-priced
- Available in HVLP or conventional models
- Performance parts (air cap and fluid tip) manufactured with state-of-art precision equipment in the U.S.
- · Low air consumption
- Stainless steel fluid tip and needle
- Less time spent on refills
 - 1 liter aluminum cup (GFC-502)
- Quick clean-up and upside-down spraying with no cup leaks with E-Z Liner[™] disposable cup liners

Gravity Feed Model Includes:

- 1 liter aluminum cup
- − 2 E-Z LinerTM disposable cup liners (OMX-70)
- -1.3 mm fluid tip (conventional)
- -1.5 mm & 1.8 mm fluid tips (HVLP)
- Air adjusting valve with gauge (HAV-501) (HVLP gun)
- Gun hook, spray lube, fluid filter





Technical Specifications

<u>HVLP Model (FLG-691-315)</u> with 1.5 mm & 1.8 mm Fluid Tips 23 psi inlet pressure delivers 10 psi air cap pressure at 13 cfm air volume

(FLG-463) Air Cap Test Kit


Note: Gun trigger must be pulled when adjusting air inlet pressure.

Conventional Model (FLG-695-113) with 1.3 mm Fluid Tip 9.9 cfm @ 40 psi inlet pressure



Refer to Service Bulletin: SB-2-614

FinishLine 3® Gravity Feed Spray Gun




Ref. No.	Model No.	Description	Ind. Parts Required
1	FLG-301	Retaining Ring	1
2	See Chart 1	Air Cap	1
3	See Chart 1	Fluid Tip	1
•4	FLG-304-K5	Fluid Tip Seal (Kit of 5)	1
5	See Chart 1	Fluid Tip & Seal Kit	1
6	FLG-305	Baffle	1
7	KGP-13-K5	Cup Gasket Kit (Kit of 5)	1
8	FLG-308	Spreader Adjustment Valve	1
•9	_	Seal	1
10	_	Bushing	1
11	FLG-483	Seal, Bushing, Spring & Knob Kit	1
12	FLG-311	Fluid Needle	1
•13	_	Needle Spring	1
14	_	Needle Adjusting Knob	1
•15	_	Air Valve	1
•16	_	Air Valve Spring	1
17	_	Air Valve Cap	1
18	FLG-487	Air Valve Kit	1
19	FLG-322	Air Inlet Fitting	1
•20	_	Trigger Screw	1
21	_	Trigger	1
•22	_	Trigger Stud	1
23	FLG-485	Trigger, Stud & Screw Kit	1
•24	_	Needle Packing	1
25	_	Needle Packing Nut	1
26	FLG-484	Needle Packing (3) and Nut (1) Kit	1
27	GFC-502	Metal Gravity Feed Cup	1
28	GFC-404-K2	Disposable Lid Kit (Kit of 2)	1
29	KGP-5-K5	Filter Kit (Kit of 5)	1
+30	OMX-70	Disposable Liner	1
31	192219	Plastic Coated Gun Hook	1

- A quantity of necessary parts is included in Repair Kit FLG-488 for complete gun repair and
- + Optional Disposable Liner Kit OMX-70-K48 includes: 1 Piercing Tool, 48 Liners, and Drain Bushings.





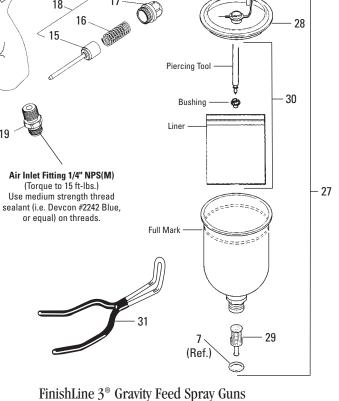

Model No.	Туре	Fluid Tip(mm)	Air Cap	Applications
FLG-691-315	HVLP	1.5	#3	General purpose, light to medium viscosity materials
		1.8	#3	Primers and medium viscosity materials
FLG-695-113	Conventional	1.3	#1	General purpose, light to medium viscosity materials

▲ Air Cap & Fluid Tip Chart #1

		*		
Spray Gun Model No.	No. on Air Cap	Ref. No. 2 Air Cap Model No.	Ref. No. 3 Fluid Tip Model No.	Fluid Tip Size
FLG-695-113	1	FLG-1-1	FLG-302-13K	1.3 (Std.)
FLG-691-315	3	FLG-1-3	FLG-302-15K	1.5 (Std.)
			FLG-302-18K	1.8 (Opt.)
			FI G-302-22K	2.2 (Ont.)



World Headquarters Industrial Finishing DeVilbiss 195 Internationale Blvd. Glendale Heights, IL 60139 630-237-5000 Fax 630-237-5011 www.devilbiss.com



Customer Service 1.800.992.4657