

LED-1260WMPS



FRANCE COMPACT WET-LISTED 60W 12V CLASS P LED POWER SUPPLY



SPECIFICATIONS

Size

8.05" Long x 1.97" Wide x 1.42" Tall
Including Baseplate & Conduit Fittings

Ambient Operating Temperature

-30°C to 60°C

Input

120/277VAC, 50/60Hz, 1.2/.70 Amp Max

Output

12VDC, 5 Amp, 60 Watt
Class 2 Isolated
No Minimum Loading Requirement

Lead Length

12" RTJW Input and Output

Environment

IP68, For Use in Dry, Damp, or Wet Locations
FCC Part 15 Class B Residential or Commercial

Warranty

5 Year France LED Warranty

A Fusion of Performance, Quality, Compact Size, and Value

Compact Wet-Listed Construction

Low profile and fully potted, with wet-listed conduit fittings for maximum water resistance

Tru-Power™ Rated

Designed to operate reliably at full rated power at maximum rated ambient temperature - No need to de-rate like other competing products

Overload Protection Shut Down

Unit blinks LEDs when significantly overloaded
Integrated short circuit protection with automatic reset

High Electrical Efficiency

Low energy costs and cool operation in a small package
85° maximum case temperature


For more information, contact
your France distributor or email
us at sales@sfeg.com

LED-1260WMPS Wet-Listed 60 Watt 12V Class P LED Power Supply

Electrical Specification

Input Voltage 120VAC | 277VAC
Input Frequency 50/60 Hz
Max Input Current 1.2A | .70A

Output Voltage 12VDC
Rated Output Current 5.0 Amps
Rated Output Power 60 Watts

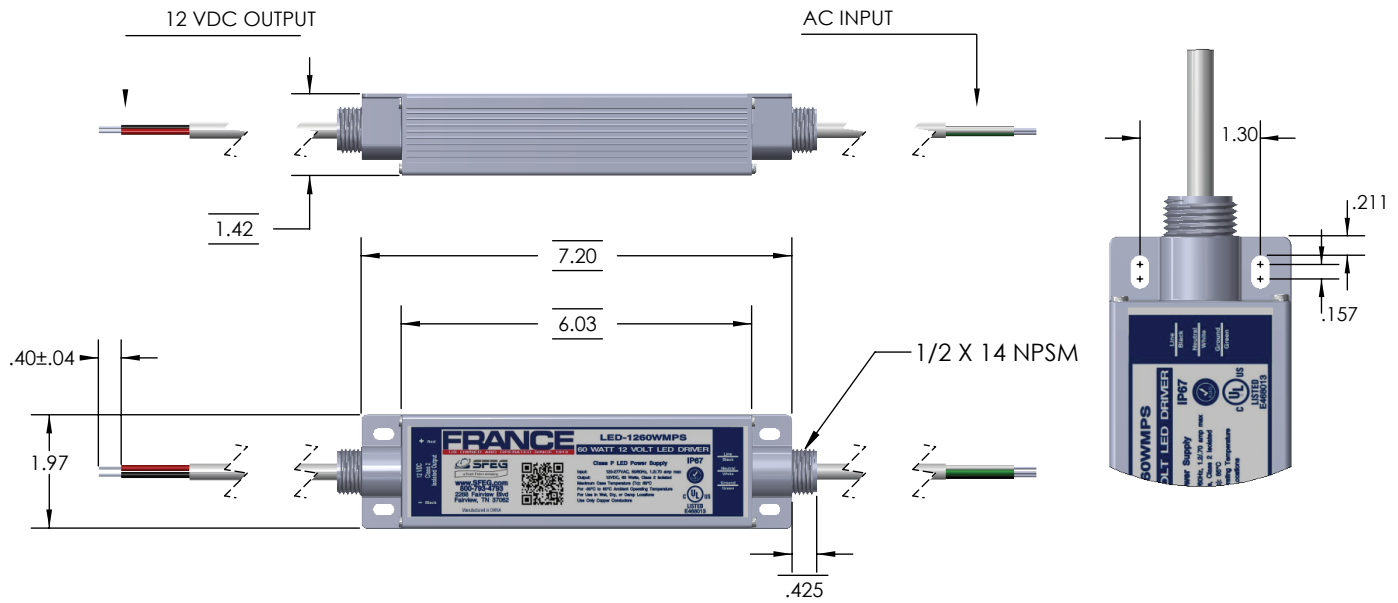

Check out our other LED Products




LED-1260MMPS

60W 12V Class P LED power supply
Compact size, great performance and value
Excellent thermal characteristic and overload protection
For use in Dry or Damp locations
France 5 year warranty


LED Fast-Pak™ Kits

Complete UL listed assemblies, pre-assembled, pre-wired and worry free.




LED Fast-Pak™

14.85" long x 5.30" wide x 3.21" in tall
Features LED-1260EPS power supply
Wet-listed enclosure



mini LED Fast-Pak™

9.71" long x 4.73" wide x 2.99" tall
Features LED-1260MPS power supply
Horizontal or vertical mount
Wet-listed enclosure



Double mini LED Fast-Pak™

10.49" long x 8.78" wide x 2.99" tall
Features 2X LED-1260MPS power supply
Horizontal or vertical mount
Wet-listed enclosure

For more information, contact your France distributor or email us at sales@sfeg.com