



GE
Lighting

13767 - GE Daylight T12

F84T12D/HO 15PK

GENERAL CHARACTERISTICS

Base Description	Recessed Double Contact
Base Type	Pin/Plug-In
Mercury Content	90 mg
Mercury-Picogram per mean lm hr	1325.1
Starting Temp (MIN) C-degrees	-29 °C
Bulb Material	Soda lime
Rated Life Hours-nominal	12000 h
Primary Application	Full Wattage
Product Technology	Linear Fluorescent
Base	R17d
Bulb Shape	T12

PHOTOMETRIC CHARACTERISTICS

Mean Lumens nominal	5660 lm
Nominal Initial Lumen per Watt	65
Initial Lumens-nominal	6500 lm
Color Rendering Index-CRI	75
Color Temperature	6500 K

PRODUCT INFORMATION

Product Code	13767
Description	F84T12D/HO 15PK
Alternative Unit Of Measure	CASE

DIMENSIONS

Bulb Diameter (DIA) <Max>	1.59 in
Bulb Diameter (DIA) <Min>	1.41 in
Diameter	1.5 in
End of Base Pin to Pin	81.72 in
Nominal Length	84.0 in

ELECTRICAL CHARACTERISTICS

Current Crest Factor (MAX)	1.7
Open Circuit Voltage (rapid start) Min @ Temperature	430.00 V @ 10 °C
455.00 V @ -29 °C	Cathode Resistance Ratio - Rh/Rc (MIN)
4.250	Cathode Resistance Ratio - Rh/Rc (MAX)
6.500	Rated power (Watts)



CAUTIONS & WARNINGS


Caution

- Lamp may shatter and cause injury if broken
- Wear safety glasses and gloves when handling lamp.
- Do not use excessive force when installing lamp.

Warning

- Risk of Electric Shock
- Turn power off before inspection
- installation or removal.



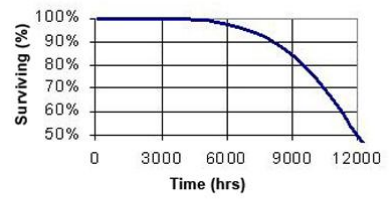

Jan 28, 2016 10:24:07 AM For additional information, visit www.gelighting.com