



Allanson

StormTight LED 3 Watt

Excellent for retrofitting fluorescent sign cabinets

**Balanced Even
Illumination**

ACLW-CW-3W

Allanson's powerful 3 watt StormTight ACLW-CW-3W module can be spaced in rows at 12" and on our extruded aluminum rail which saves on installation costs. The rail also allows for the illumination of double sided signs by mounting the 3 watt modules back to back.

- 3 x 1.3 watts emitters – 420 lumens
- 12 volts DC
- Wide 155 degree beam angle for even light distribution
- Sealed construction for reliable all weather operation
- Recommend 6" to 10" sign depth
- Max. load 12 modules or 4 rows of 3 modules per 60 watt power supply
- Proven metal back construction for long reliable life
- Aluminum printed circuit board for long emitter life
- Color Temperature white 6300K



MODULES-03-13




StormTightLED

StormTight LED 3 Watt

Specifications

Part Number	LEDs per Module	Lumens per Module	Watts per Module	Lumens per Watt	Modules per Foot	Lumens per Foot
ACLW-CW-3W	3	420	3.9	108	0.75	315
	Supply Voltage		Power Capacity			
	DC 12 V		12 modules per CV125-120 power supply			

Compatible Power Supplies	Part Number	Power Supply	
	CV121 (12W)	CV121	2
	CV122-120 (24W)	CV122-120	5
	CV125-120 (60W)	CV125-120	12
	CV12125 (2x60W)	CV12125	24

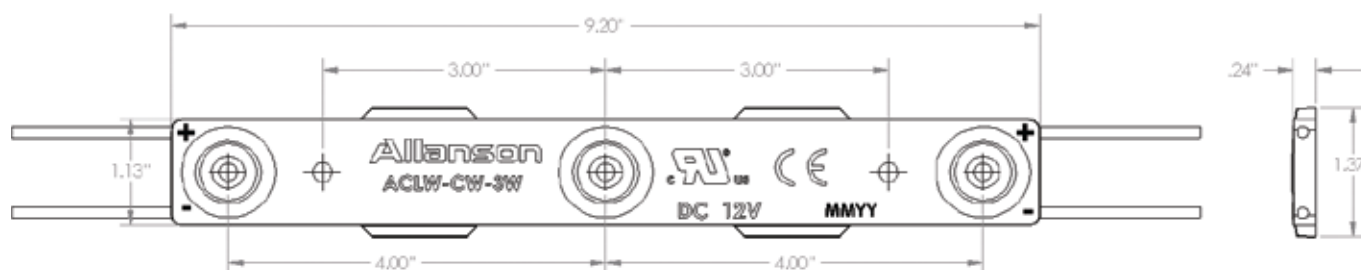

For all your population services contact us at led@allanson.com

Visit us at www.allansonled.com

US
Phone 1-800-559-3659
Fax 1-615-643-1890
Email customerservice@eballast.com

CANADA
 1-800-661-7251
 1-416-7526717
custserv@allanson.com

 **StormTightLED**